


# Easy Connect (EZConnect™) INSTRUCTIONS (REU-EZC-1US)


## EZConnect Installation

1. EZConnect allows the installation of two Water Heater units together utilizing the EZConnect cord.
2. Install the two Water Heater units 2" ~ 18" apart so that the cord will be able to reach between two units.
3. Do not install more than 18" apart between two water heaters. To do so, will cause temperature fluctuations (cold water sandwich effect) whereby the water is shut off, then turned on again.
4. The EZConnect shall be disabled before installing with the MSA controller system.

## Recommended Installation Layout:

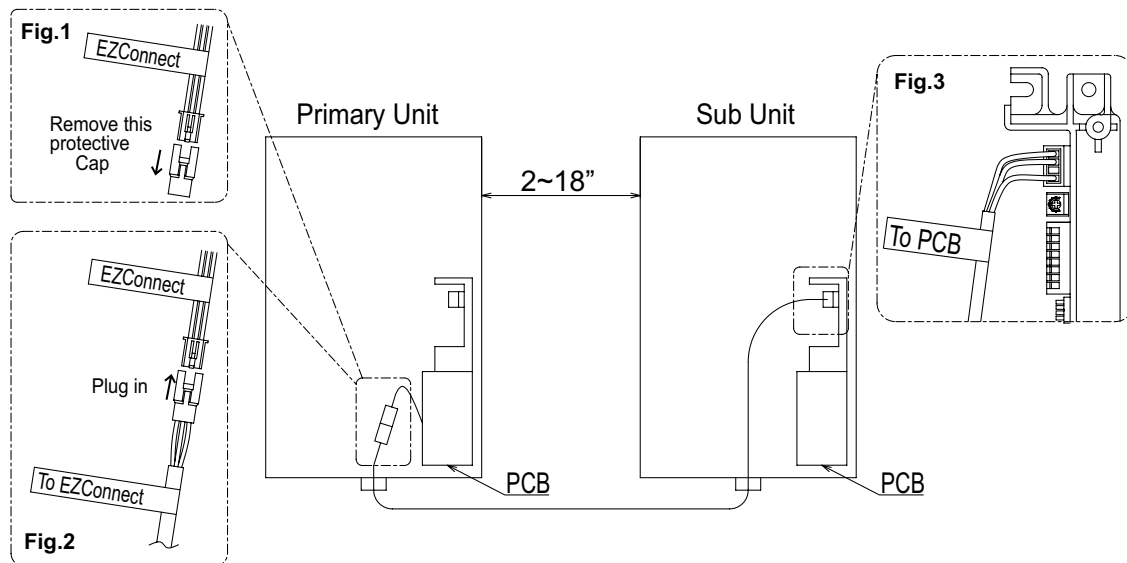

5. Before installing the EZConnect cord, remove the protective cap from the 3 pin connector marked "EZConnect" located in the wiring harness of the Primary Unit. (Fig.1)
6. To install the EZConnect cord, plug in the cord on both the Sub unit and Primary unit accordingly – see installation layout above. (Fig.2,3)
7. Securely tighten the EZConnect cord to the bottom of Water Heater by using Cable Clamp and Screw supplied. (Fig.4)  
(Both of Primary and Sub Unit)

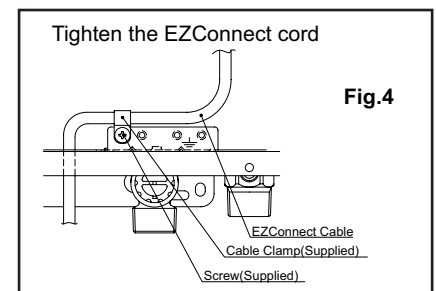

- Temperature settings can only be changed on the primary unit controller.
- This system can not use the bathfill function.